

UniFi UISP Branding

Search UniFi products

Switching WiFi Camera Security Door Access CloudKeys & Gateways Power Tech New I


Readers > G2 Reader

Datasheet

In The Box

Marketing Images

Installation Guide

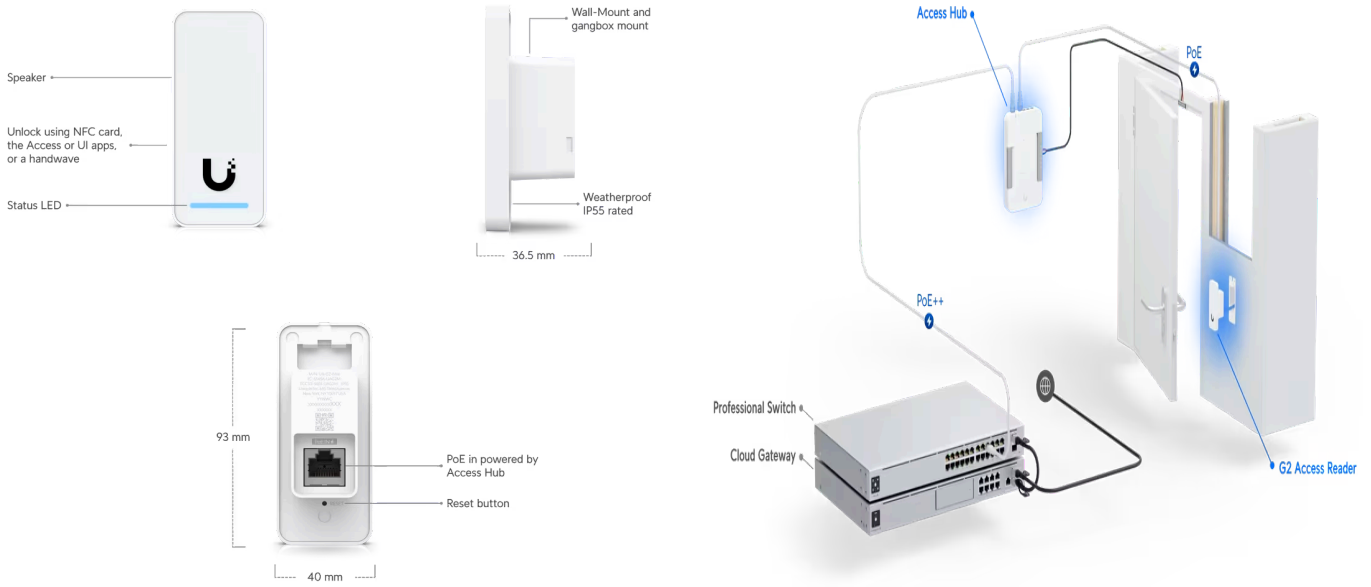

### Mechanical

Dimensions 93 x 40 x 36.5 mm (3.7 x 1.6 x 1.4")

Weight 82 g (2.9 oz)

Enclosure material Polycarbonate, glass

Mounting In wall, gang box

Weatherproofing IP55

### Hardware

Networking interface (1) 10/100 MbE RJ45 port

<b>Connectivity</b>	BLE 4.1
<b>Power method</b>	PoE UL 294 Power-limited Class 2 PSU UL 60950-1/62368-1 LPS/PS2 PSU
<b>Supported voltage range</b>	48V DC
<b>Max. power consumption</b>	5W
<b>ESD/EMP protection</b>	Air: ±15kV, contact: ±8kV
<b>Sensors</b>	Proximity sensor
<b>Speaker</b>	(1) 8 ohm, 0.7W
<b>LEDs</b>	Steady white: Pending adoption Steady blue: Adopted Alternating white/blue: Firmware updating Strobing red: Emergency lockdown Steady green: Emergency evacuation (2) Rapid flashing blue: NFC credential authenticated (2) Rapid flashing red: NFC credential authentication failed Breathing blue: Ready to register NFC cards
<b>Button</b>	(1) Factory-reset
<b>NFC frequency</b>	13.56 MHz
<b>NFC read range</b>	< 30 mm
<b>NFC standards</b>	ISO 14443A, 14443B, 15693
<b>NFC technology</b>	NFC Tag 1,2,3,4,5 MIFARE Classic MIFAREPlus MIFARE Ultralight MIFARE DESFire
<b>Operating environment</b>	Outdoor use
<b>Ambient operating temperature</b>	-30 to 45° C (-22 to 113° F)
<b>Ambient operating humidity</b>	5 to 90% noncondensing
<b>Software information</b>	The software version of a product can be checked at <a href="https://unifi.ui.com">https://unifi.ui.com</a>
<b>UL 294 level</b>	Destructive attack: Level I Line security: Level I Endurance: Level I Standby power: Level I
<b>UL 294 statement</b>	Compliance with IEEE 802.3 specifications was not verified as part of UL 294. The equipment is intended to comply with the section of the National

Electrical Code, ANSI/NFPA 70, Article 725.121, Power Sources for Class 2 and Class 3 Circuits.

**PoE cabling requirements**

Cable 5e cabling is the minimum performance category recommended. The performance category utilized should match the transmission speed required at the installation site. The minimal conductor gauge permitted to connect between the PSE or power injector and the PD shall be 26 AWG (0.13 mm<sup>2</sup>) for patch cords; 24 AWG (0.21 mm<sup>2</sup>) for horizontal or riser cable.

**CAN/ULC-60839-11-1 Grade**

Grade assignment: I

**Certifications**

CE, FCC, IC, UL 294, CAN/ULC-60839-11-1

**Document number, and issue date and/or revision level**

UA-G2/UA-G2-Black, V02

---

**Software**

**Management application**

UniFi Access: Version 1.5.9 and later

**Stay in Touch**



[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2024 Ubiquiti, Inc. All rights reserved.