

[UniFi](#) [UISP](#) [Branding](#)

Q Search UniFi products

[Switching](#)

[WiFi](#)

[Camera Security](#)

[Door Access](#)

[CloudKeys & Gateways](#)

[Power Tech](#)

[New I](#)


Camera Security > [PoE Smart Chime](#)

[Datasheet](#)

[In The Box](#)

[Marketing Images](#)

[Installation Guide](#)

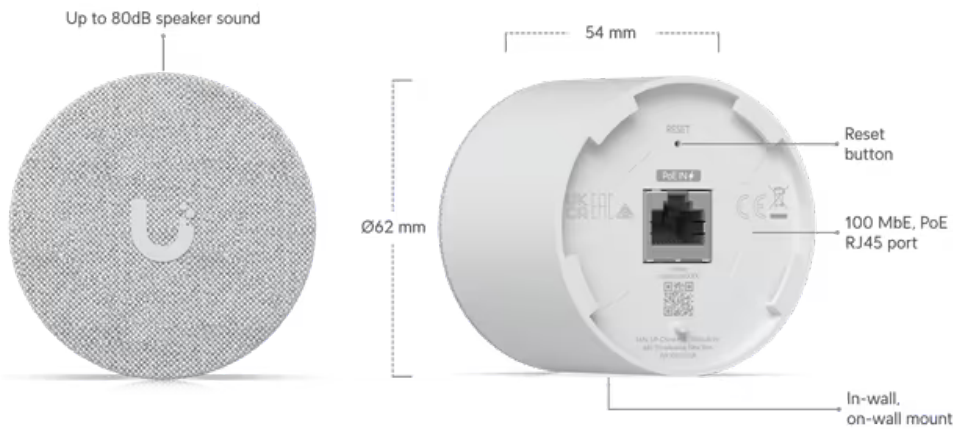

Mechanical

Dimensions

Device: Ø62 x 54 mm (Ø2.5 x 2.1")

In-wall mount: Ø89 x 63.1 mm (Ø3.5 x 2.5")

On-wall Mount: Ø62 x 20.2 mm (Ø2.5 x 0.8")

Weight

Device: 158 g (5.6 oz)

In-wall mount: 91 g (3.2 oz)

On-wall mount: 28 g (1 oz)

Enclosure material

Polycarbonate, aluminum alloy

Mount material

Polycarbonate, zinc alloy

System

Networking interface

10/100 MbE port

Power method	PoE
Supported voltage range	44—57V DC
Max. power consumption	3W
ESD/EMP protection	Air: $\pm 8\text{kV}$, contact: $\pm 4\text{kV}$
LED	R/G/B/W
Button	Factory reset
Ambient operating temperature	0 to 40° C (32 to 104° F)
Ambient operating humidity	10 to 90% noncondensing
Certifications	CE, FCC, IC

Audio

Speaker	Yes
Buzzer	Yes

Software

Web application	UniFi Protect UniFi Access
Mobile app	UniFi Protect iOS™ and Android™

Stay in Touch



[Terms and Conditions](#) | [Terms of Service](#) | [Privacy Policy](#) | [Return Policy](#) | [Cookies Settings](#)

© 2024 Ubiquiti, Inc. All rights reserved.