


ViFi Switching Cloud Keys & Gateways Camera Security Door Access Managed VoIP New

Cloud Keys & Gateways > Gateway Max

Datasheet In The Box Marketing Images Installation Guide



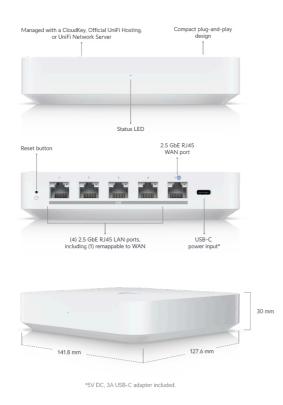

### Mechanical

**Dimensions** 141.8 x 127.6 x 30 mm (5.6 x 5 x 1.2")

**Weight** 520 g (1.1 lb)

Enclosure material Polycarbonate

Resistance IK04

#### Hardware

Processor Quad-core ARM® Cortex®-A53 at 1.5 GHz

Memory information 2 GB DDR4

Management interface Ethernet

Bluetooth

Networking interface LAN:

(4) 2.5 GbE RJ45 ports

WAN:

(1) 2.5 GbE RJ45 port

Power method USB type C (5V/3A)

Supported voltage range 100-240V

Max. power consumption 9.6W

**LED** Ethernet

White: link/activity

**Button** (1) Factory reset

Ambient operating temperature -10 to 40° C (14 to 104° F)

**Ambient operating humidity** 5 to 95% noncondensing

**Certifications** CE, FCC, IC

#### **Gateway Features**

Performance WiFi QoS with UniFi APs

Application, domain, and country-based QoS Application and device type identification Internet quality and outage reporting

**Next-generation security**Application-aware firewall rules

Signature-based IPS/IDS threat detection Content, country, domain, and ad filtering VLAN/subnet-based traffic segmentation

Full stateful firewall

Advanced networking License-free SD-WAN\*

WireGuard, L2TP and OpenVPN server

OpenVPN client

OpenVPN and IPsec site-to-site VPN

One-click Teleport\* and Identity Enterprise VPN\*\*

Policy-based WAN and VPN routing

DHCP relay

Customizable DHCP server IPv6 ISP support

- \*When paired with a Cloud Key or Official UniFi Hosting.
- \*\*When paired with a Cloud Key.

## **Application Requirements**

**UniFi Network** 

Version 8.1.113 and later

# Stay in Touch Email

Subscribe



Terms and Conditions | Terms of Service | Privacy Policy | Return Policy | Cookies Settings

© 2024 Ubiquiti, Inc. All rights reserved.